

# FLOW SIGHT GLASS GAUGE

## T SERIES – Thread Connection With Spring Paddle

The flow sight glass was designed with spring paddle for easy observation of flowing fluid from any direction.

### Technical Data

- Service:** – Compatible gas and liquid – Water treatment system  
 – Industrial flow system – Double window indication
- Material:** Body– SS304, SS316, SS316L; Paddle– SS316; Spring – SS316  
 Gauge– Tempered glass; Gasket– Teflon, Gore Tex, Graphite
- Max working temperature:** 150°C (Teflon), 300°C (Gore-Tex)
- Max working pressure:** TA type: 10kg/cm<sup>2</sup> @25°C water;  
 TB type: Available for 15, 25 and 40kg/cm<sup>2</sup> @25°C water

### Dimension


**(A) TA Type**

Range Size	15A	20A	25A	40A	50A
L	114	114	114	130	150
H	72	72	72	120	136

**(B) TB Type**

Range Size	15A	20A	25A	40A	50A
L	114	114	114	130	150
H	72	72	72	115	129

unit=mm

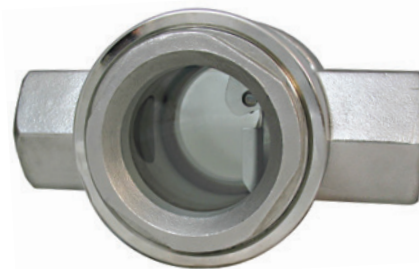

TA TYPE




TB TYPE

Approvals:



### Mounting Position

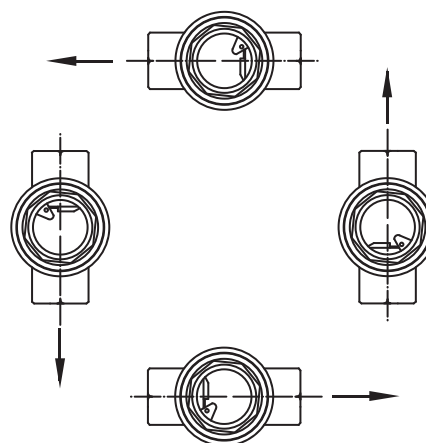

### Ordering Information

TA/TB	Code	Body Material	Code	CE 1128 Mark Request
↓	↓	(A) SS304 (B) SS316 (C) SS316L	1	with Label Sticker
		Code Size	2	with S.S Nameplate
		(1) 15A (2) 20A (3) 25A (4) 40A (5) 50A	3	Stamp
		Code Connection Thread	4	Without
		(1) NPT (2) PF (3) Option		
↓	↓	Code Gasket Material		Code Max. Working Pressure
		(1) Teflon (2) Gore-Tex (3) Graphite		0 10 kg/cm <sup>2</sup> (for TA type only)
				1 15 kg/cm <sup>2</sup> (for TB type)
				2 25 kg/cm <sup>2</sup> (for TB type)
				3 40 kg/cm <sup>2</sup> (for TB type)
↓			+	Complete Ordering Code